

Application No.: 10/785150
 Docket No.: CL2074USNA


Page 2

Amendments to Claims

Claim 1. (Currently Amended) A process for growing a polyethylene glycol alkyl acrylate (PEGAA) film on a substrate having a moiety accepting surface comprising

(a) contacting at least one initiator molecule with the moiety accepting surface of the substrate to form an initiator coated substrate, said initiator molecule being selected from the group consisting of

i)

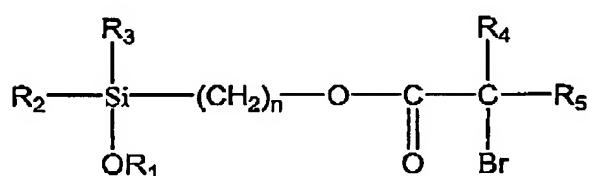


wherein:

n is an integer of 1 to 50;

R₁ and R₄ are each independently a CH₃, C₂H₅, or an alkyl of 3 to 20 carbons;R₂ and R₃ are each independently a CH₃, C₂H₅, OR₁, or an alkyl of 3 to 20 carbons; andR₅ is a H, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons,

Provided that the initiator is not a compound where R₁ is C₂H₅, R₂ and R₃ are CH₃, and R₅ is C₂H₅:

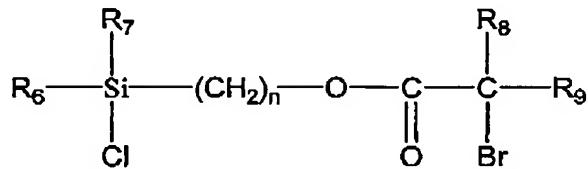

ii)

wherein:

n is an integer of 1 to 50;

R₆ and R₇ are each independently Cl, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons;

Application No.: 10/785150
 Docket No.: CL2074USNA


Page 3

R_8 is a CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons; and

R_9 is a H, CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons, and

iii) mixtures thereof; and

- (b) further contacting the initiator coated substrate with at least one polyethylene glycol alkyl acrylate monomer in solution, wherein said polyethylene glycol alkyl acrylate monomer has the general formula

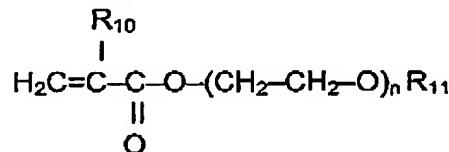


wherein:

n is an integer of 1 to 100; and

R_{10} and R_{11} are each independently H, CH_3 , C_2H_5 , or an alkyl of 1 to 20 carbons, further wherein at least one catalyst and optionally at least one ligand are added to the solution containing the polyethylene glycol alkyl acrylate monomer.

Claim 2. (Original) The process according to claim 1, wherein the moiety accepting surface of the substrate is further contacted in step (a) with at least one spacer molecule, wherein said spacer molecule comprises at least one of

- (i) alkyl chains having the following general formulas

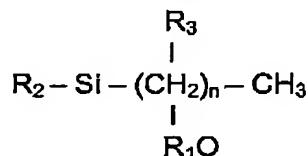


wherein:

n is an integer of 1 to 50;

R_1 is a CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons;

R_2 and R_3 are each independently a CH_3 , C_2H_5 , OR₁, or an alkyl of 3 to 20 carbons; and

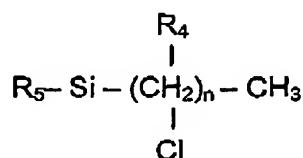

wherein:


Application No.: 10/785150
 Docket No.: CL2074USNA

Page 4

n is an integer of 1 to 50;

R₄ and R₅ are each independently Cl, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons;


(ii) phenyl and phenyl derivatives having the following general formula



wherein:

R₁ and R₂ are each independently Cl, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons; or

(iii) a mixture of alkyl chains and functional groups having the following general formula

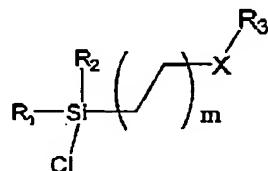

wherein:

m is an integer of 1 to 50;

R₁ and R₂ are each independently Cl, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons;

R₃ is a phenyl, OH, NH₂, or an alkyl of 3 to 20 carbons; and

X is an O, COO, or a CONH.

Claim 3. (Original) The process according to claim 2, wherein the spacer molecule is n-propyl triethoxysilane.

Claim 4. (Original) The process according to claim 2, wherein the initiator to spacer molecule ratio ranges from about 95.5 mol % to 1:99 mol %.

Claim 5. (Original) The process according to claim 1 or 2, wherein the initiator molecule is 5'-(triethoxysilylpentyl) 2-bromo-2-methylpropionate.

Claim 6. (Original) The process according to claim 1 or 2, wherein the polyethylene glycol alkyl acrylate monomer is polyethylene glycol methacrylate.

Application No.: 10/785150
Docket No.: CL2074USNA

Page 5

Claim 7. (Original) The process according to claim 1 or 2, wherein the substrate is selected from the group consisting of glass, metal oxide, silicon, fabric, quartz, zirconia and polymeric resins.

Claim 8. (Original) The process according to claim 1, wherein the polyethylene glycol alkyl acrylate film grown on the surface of the substrate has a thickness ranging from about 0.5 nm to about 5000 nm.

Claim 9. (Currently Amended) The process according to claim 1, wherein the polyethylene glycol alkyl acrylate film grown on the surface of the substrate has a density of polyethylene glycol alkyl acrylate polymer chains ranging from about 10⁻⁵ to about 5.0 umol/m² 0.1% to about 100%.

Claim 10. (Original) The process according to claim 1 further comprising baking the substrate after said substrate is coated with the at least one initiator molecule, wherein said substrate is baked in an oven at a temperature ranging from 100° C to 180° C for a time period ranging from 30 minutes to 10 hours.

Claim 11. (Original) The process according to claim 1, wherein a polar solvent is added to the solution containing the polyethylene glycol alkyl acrylate monomer.

Claim 12. (Original) The process according to claim 11, wherein the polar solvent is water.

Claim 13. (Original) The process according to claim 1 or 2, wherein step (a) is performed in the presence of a solvent.

Claim 14. (Original) The process according to claim 13, wherein said solvent is selected from the group consisting of water, hydrocarbons, ethers, halogenated hydrocarbons, ketones, methyl ethyl ketones, methyl isobutyl ketones, alcohols, nitriles, esters, carbonates, inorganic solvents, and mixtures thereof.

Claim 15. (Original) The process according to claim 1 or 2, wherein the ligand is selected from the group consisting of 2,2'-bipyridyl, 1,10-phenanthroline, an alkylamine, a polyamine, and a trialkoxyaluminum.


Application No.: 10/785150
 Docket No.: CL2074USNA

Page 6

Claim 16. (Original) The process according to claim 1 or 2, wherein the catalyst is selected from the group consisting of cuprous chloride, cupric chloride, cuprous bromide, cuprous iodide, cuprous cyanide, cuprous oxide, cuprous acetate, cuprous perchlorate, a tristriphenylphosphine complex of divalent ruthenium ($\text{RuCl}_2(\text{PPh}_3)_3$), and tristriphenylphosphine complex of divalent iron ($\text{FeCl}_2(\text{PPh}_3)_3$).

Claim 17. (Currently Amended) A biologically resistant device having deposited thereon a polymeric composition comprising at least one initiator molecule selected from the group consisting of

i)

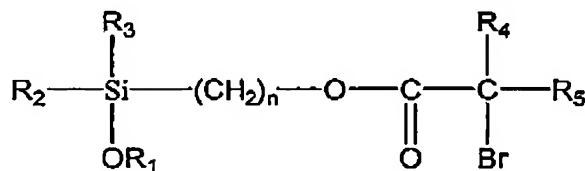


wherein:

 n is an integer of 1 to 50; R_1 and R_4 are each independently a CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons; R_2 and R_3 are each independently a CH_3 , C_2H_5 , OR_1 , or an alkyl of 3 to 20 carbons; and R_5 is a H , CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons,

Provided that the initiator is not a compound where R_1 is C_2H_5 , R_2 and R_3 are CH_3 , and R_5 is C_2H_5 .

ii)

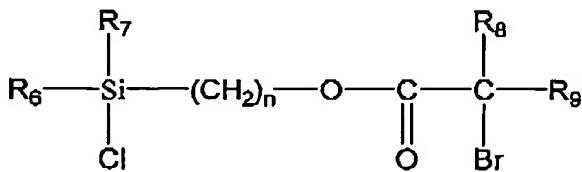

wherein:

 n is an integer of 1 to 50; R_6 and R_7 are each independently Cl , CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons;


Application No.: 10/785150
 Docket No.: CL2074USNA

Page 7

R_8 is a CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons; and
 R_9 is a H, CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons, and

iii) mixtures thereof; and

(b) at least one polyethylene glycol alkyl acrylate monomer having the general formula

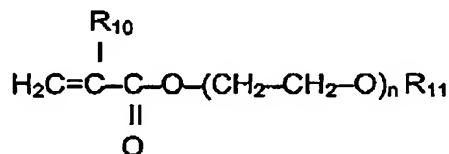

wherein:

n is an integer of 1 to 100; and


R_{10} and R_{11} are each independently H, CH_3 , C_2H_5 , or an alkyl of 1 to 20 carbons.

Claim 18. (Original) The device of claim 17, wherein the initiator molecule of the polymeric composition is 5'-(triethoxysilylpentyl) 2-bromo-2-methylpropionate.

Claim 19. (Original) The device according to claim 17, wherein the polyethylene glycol alkyl acrylate monomer of the polymeric composition is polyethylene glycol methacrylate.

Claim 20. (Original) The device according to claim 17, wherein the polymeric composition optionally further comprises a spacer molecule comprising at least one of

(i) alkyl chains having the following general formulas

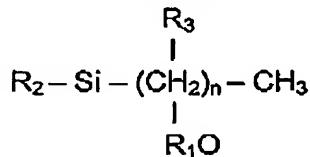


wherein:

n is an integer of 1 to 50;

R_1 is a CH_3 , C_2H_5 , or an alkyl of 3 to 20 carbons;

R_2 and R_3 are each independently a CH_3 , C_2H_5 , OR₁, or an alkyl of 3 to 20 carbons; and



Application No.: 10/785150
 Docket No.: CL2074USNA

Page 8




wherein:

n is an integer of 1 to 50;

 R_4 and R_5 are each independently Cl, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons;


(ii) phenyl and phenyl derivatives having the following general formula

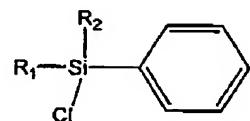

wherein:

 R_1 and R_2 are each independently Cl, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons; or

(iii) a mixture of alkyl chains and functional groups having the following general formula

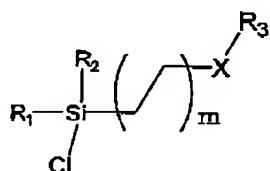

wherein:

m is an integer of 1 to 50;

 R_1 and R_2 are each independently Cl, CH₃, C₂H₅, or an alkyl of 3 to 20 carbons; R_3 is a phenyl, OH, NH₂, or an alkyl of 3 to 20 carbons; and

X is an O, COO, or a CONH.

Claim 21. (Original) The device according to claim 20, wherein the spacer molecule of the polymeric composition is n-propyl triethoxysilane.

Claim 22. (Original) The device according to claim 20, wherein the polymeric composition has an initiator to spacer molecule ratio ranging from about 1:99 to about 99:1.

Claim 23. (Original) A substrate coated according to the process of claim 1 or 2.

Application No.: 10/785150
Docket No.: CL2074USNA

Page 9

Claim 24. (Original). The substrate of claim 23, wherein said substrate is selected from the group consisting of glass, metal oxide, silicon, fabrics, porous substrates, quartz, polymeric substrates reinforced with other inorganic materials, zirconia and polymeric resins.

Claim 25. (Currently Amended) The substrate of claim 23, wherein the moiety accepting surface of the substrate has a polyethylene glycol alkyl acrylate chain density ranging from about 10⁻⁵ to about 5.0 umol/m² ~~0.1% to about 100%~~.

Claim 26. (Original) The device of claim 17, comprising a biomedical implant device, biomedical microdevice, membrane-related appliance, prosthetic device, orthopedic implantable device, biosensor, enzyme-linked immunosorbent assay (ELISA) substrate, medical device, patterned cell culture system, tissue engineered material, microfluidic and analytical system material, drug delivery device, high throughput screening system, food packaging material, hygienic product, or electronic material.

Claim 27. (Original) The device of claim 20, comprising a biomedical implant device, biomedical microdevice, membrane-related appliance, prosthetic device, orthopedic implantable device, biosensor, enzyme-linked immunosorbent assay (ELISA) substrate, medical device, patterned cell culture system, tissue engineered material, microfluidic and analytical system material, drug delivery device, high throughput screening system, food packaging material, hygienic product, or electronic material.

Claim 28. (Original) A process for growing a polyethylene glycol methacrylate film on a substrate having a hydroxylated surface comprising contacting 5'-(triethoxysilylpentyl) 2-bromo-2-methylpropionate mixed optionally with n-propyl triethoxysilane with the hydroxylated surface of the substrate in the presence of toluene; and then further contacting the surface of the substrate with polyethylene glycol methacrylate in an aqueous solution containing bipyridyl, cuprous chloride and cupric chloride.

Claim 29. (Original). The process of claim 28, wherein said substrate comprises a biomedical implant device, biomedical microdevice, membrane-related appliance, prosthetic device, orthopedic implantable device, biosensor, enzyme-linked immunosorbent assay (ELISA) substrate, medical device, patterned cell culture system, tissue engineered material,

Application No.: 10/785150

Docket No.: CL2074USNA

Page 10

microfluidic and analytical system material, drug delivery device, high throughput screening system, food packaging material, hygienic product, or electronic material.